

HD ***μ-Dimension***

75 W X 2 ch Car Amplifier

INDEX

Glow Series

FEATURES.....	2
CONTROLS AND CONNECTIONS.....	3
CONNECTION DESCRIPTIONS.....	7
INSTALLATION INSTRUCTIONS	8
SAMPLE SYSTEM CONNECTIONS	9
SPECIFICATIONS	13


FEATURES

Circuitry

100% POWER MOSFETs drove high efficiency switchi

D- B- B+ C- A- C+ A+ REM OUT REM +12V FUSES

POWER

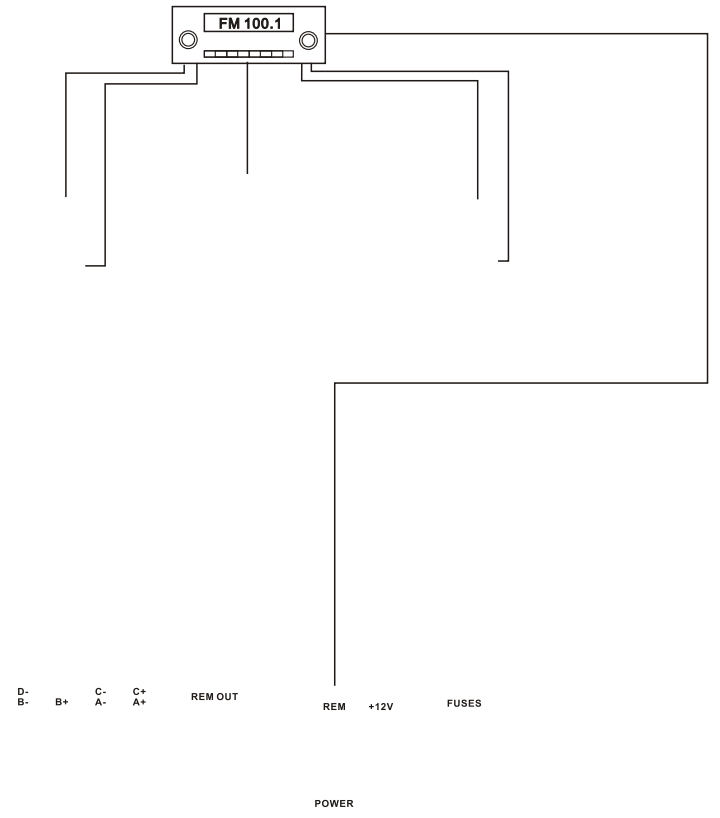


RCA Input Jacks





The Line-Out Leads of your head unit are connected here using RCA extention patch cords. Be sure to observe proper channel designation-CH A, CH B to Front Left , Right and CH C, CH D to Rear Left, Right.

SAMPLE SYSTEM CONNECTIONS

Model: Glow 2075


[Front]

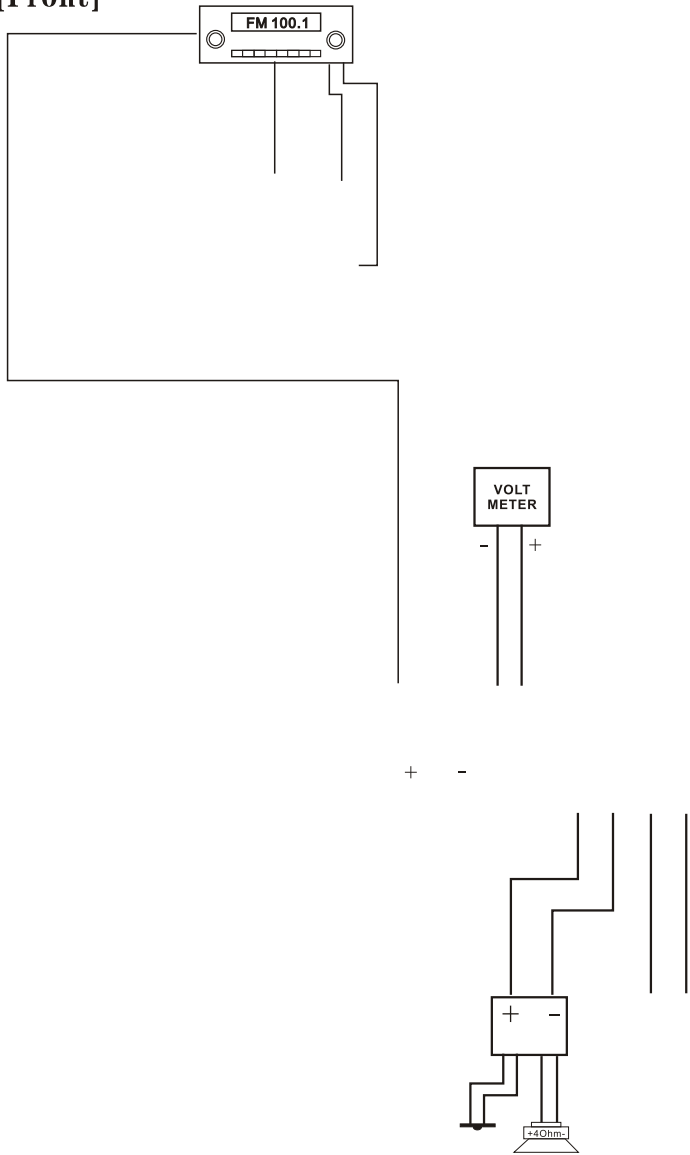

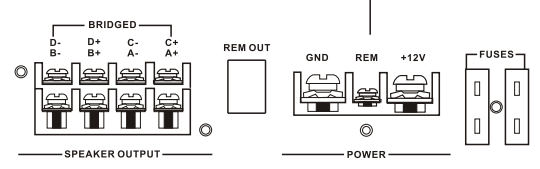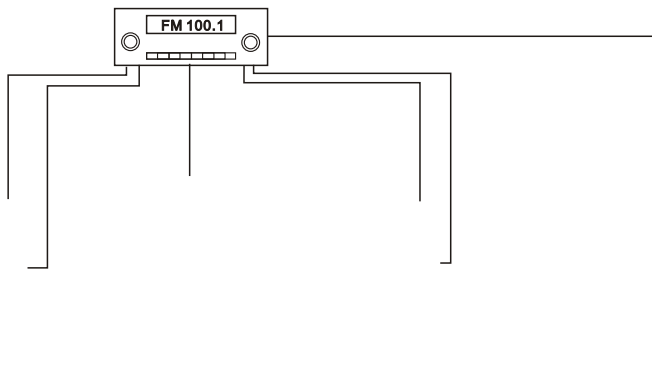

High Input Connection

Model: Glow 2075

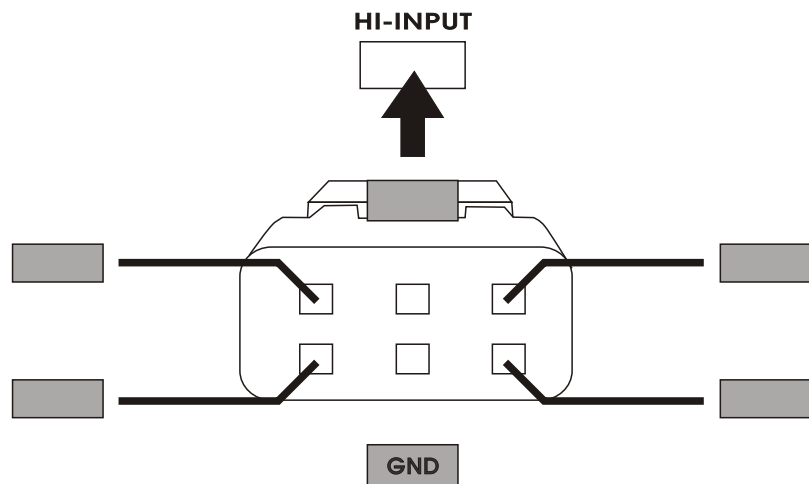

Model: Glow 4075

